


Model		QJ1503C
Output voltage		0-15V
Output current		0-3A
Line Regulation		$CV \leq 1 \times 10^{-4} + 3mV$ $CC \leq 2 \times 10^{-3} + 3mA$
Load Regulation		$CV \leq 1 \times 10^{-4} + 3mV$ $CC \leq 2 \times 10^{-3} + 3mA$
Ripple & Noise		$CV \leq 1mV_{rms}$
Protection		current Limiting
Display resolution	voltage	100mV
	current	10mA
Voltage Indication Accuracy		$\pm 0.5\% + 1d$
Current Indication Accuracy		$\pm 0.5\% + 2d$



Model	QJ3003C	QJ3005C	QJ5003C
Output voltage	0-30V	0-30V	0-50V
Output current	0-3A	0-5A	0-3A
Line Regulation	$CV \leq 1 \times 10^{-4} + 3mV$ $CC \leq 2 \times 10^{-3} + 6mA$		
Load Regulation	$CV \leq 2 \times 10^{-4} + 3mV$ $CC \leq 2 \times 10^{-4} + 6mA$		
Ripple & Noise	$CV \leq 1mVrms$		
Protection	current Limiting		
Display resolution	voltage	100mV	100mV
	current	10mA	10mA
Voltage Indication Accuracy	$\pm 1\% + 1d$		
Current Indication Accuracy	$\pm 2\% + 2d$		

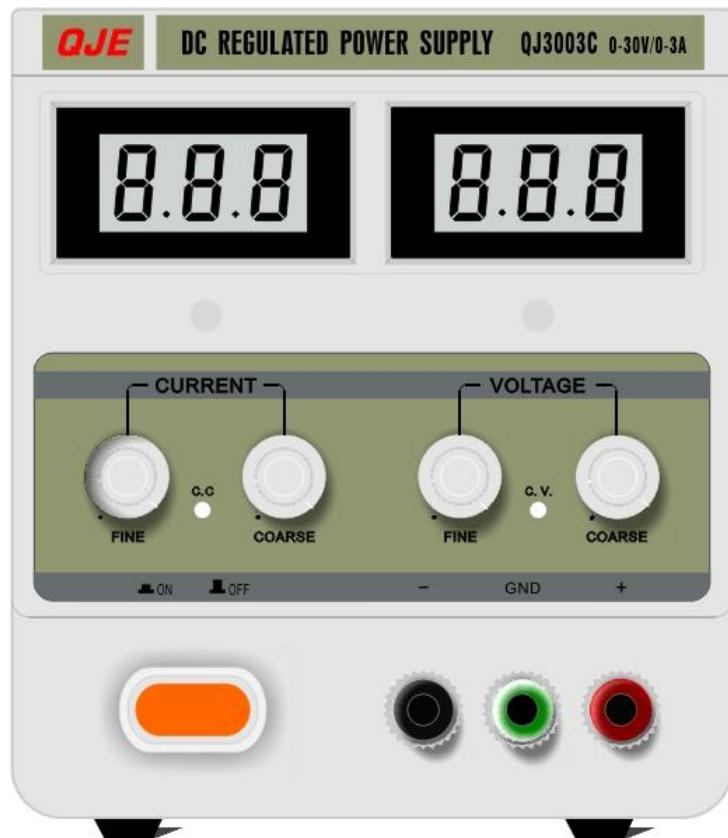

Model	QJ3003CIII	QJ3005CIII	QJ5003CIII
Output voltage	0-30V	0-30V	0-50V
Output current	0-3A	0-5A	0-3A
Line Regulation	CV≤0.01%+3mV CC≤0.01%+6mA		
Load Regulation	CV≤0.01%+2mV CC≤0.01%+6mA		
Ripple & Noise	CV ≤1mV	CV ≤1.5mV	
Protection	current Limiting		
Display resolution	voltage	100mV	100mV
	current	10mA	10mA
Voltage Indication Accuracy	±1%+2d		
Current Indication Accuracy	±1%+2d		




Model	QJ3020E	QJ12003E	QJ6005E	QJ6010E
Output voltage	0-30V	0-120V	0-60V	0-60V
Output current	0-20A	0-3A	0-5A	0-10A
Line Regulation	CV≤0.01%+3mV CC≤0.2%+6mA			
Load Regulation	CV≤0.05%+2mV CC≤0.05%+6mA			
Ripple & Noise	CV ≤1mV	CV ≤2.5mV	CV ≤1.5mV	CV ≤1.5mV
Protection	current Limiting			
Display resolution	voltage	10mV	100mV	10mV
	current	10mA	1mA	1mA
Voltage Indication Accuracy	±1%+1d			
Current Indication Accuracy	±1%+1d			



Model	QJ3030S	QJ6030S
Output voltage	0-30V	0-60V
Output current	0-30A	0-30A
Line Regulation	$CV \leq 0.05\% + 10mV$ $CC \leq 0.05\% + 10mA$	
Load Regulation	$CV \leq 0.05\% + 10mV$ $CC \leq 0.05\% + 10mA$	
Ripple & Noise	$CV \leq 2mV_{rms}$	$CV \leq 3mV_{rms}$
Protection	current Limiting	
Display resolution	voltage	100mV
	current	100mA
Voltage Indication Accuracy	$\pm 1\% + 3d$	
Current Indication Accuracy	$\pm 2\% + 3d$	




Model	QJ12005S	QJ15003S
Output voltage	0-120V	0-150V
Output current	0-5A	0-3A
Line Regulation	$CV \leq 0.05\% + 10mV$ $CC \leq 0.05\% + 10mA$	
Load Regulation	$CV \leq 0.05\% + 10mV$ $CC \leq 0.05\% + 10mA$	
Ripple & Noise	$CV \leq 40mV_{rms}$	$CV \leq 40mV_{rms}$
Protection	current Limiting	
Display resolution	voltage	100mV
	current	10mA
Voltage Indication Accuracy	$\pm 1\% + 3d$	
Current Indication Accuracy	$\pm 2\% + 3d$	

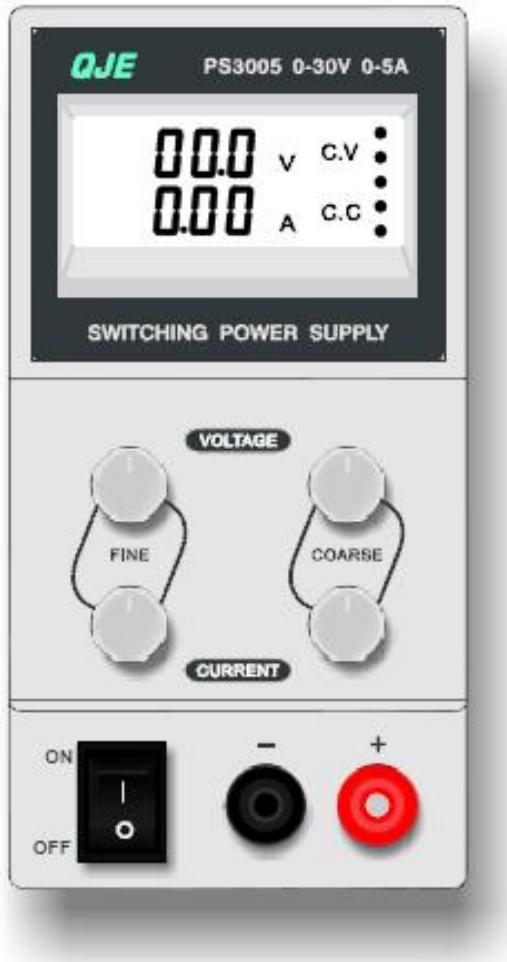

Model		PS3005
Output voltage		0-30V
Output current		0-5A
Line Regulation		CV≤1%+10mV
Load Regulation		CV≤1%+5mV
Ripple & Noise		200mVp-p
Protection		current Limiting
Display resolution	voltage	100mV
	current	10mA
Voltage Indication Accuracy		± 1%+1d
Current Indication Accuracy		± 1%+2d



Model		PS3010
Output voltage	0-30V	
Output current	0-10A	
Line Regulation	CV≤0.2%+10mv	
Load Regulation	CV≤0.2%+5mv	
Ripple & Noise	100mVp-p	
Protection		current Limiting
Display resolution	voltage	100mV
	current	100mA
Voltage Indication Accuracy		±1%+1d
Current Indication Accuracy		±1%+2d

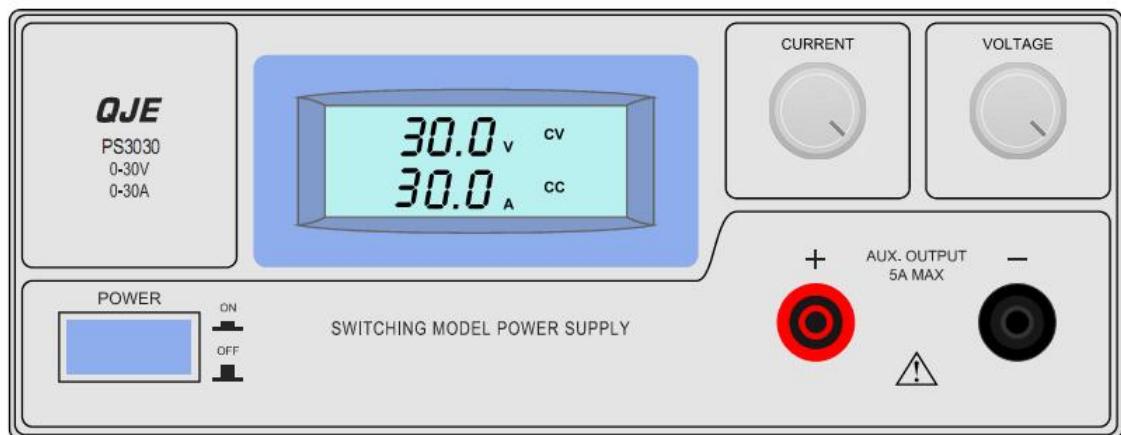

Model		PS3030
Output voltage		0-30V
Output current		0-30A
Line Regulation		CV≤0.2%+10mv
Load Regulation		CV≤0.2%+5mv
Ripple & Noise		100mV
Protection		Overload, Over Temperature
Display resolution	voltage	100mV
	current	100mA
Voltage Indication Accuracy		±0.2%+3d
Current Indication Accuracy		±0.2%+3d




Model	QJ1501D
Output voltage	0-15V
Output current	0-1A
Load Regulation	$CV \leq 150mV$
Ripple & Noise	$\leq 3mV$
Protection	Over current protection short circuit protection
Voltage Indication Accuracy	$\pm 0.5\% + 2 \text{Digits}$
Current Indication Accuracy	2 small lattices



Model	QJ3003H	QJ3005H
Output voltage	0-30V	0-30V
Output current	0-3A	0-5A
Line Regulation	$CV \leq 0.01\% + 5mV$	$CV \leq 0.01\% + 5mV$
Load Regulation	$CV \leq 0.01\% + 5mV$	$CV \leq 0.01\% + 5mV$
Ripple & Noise	$\leq 1mV$	$\leq 1mV$
Display resolution	voltage	10mV
	current	1mA
Voltage Indication Accuracy	$10mV \pm 2\text{Digits}$	$10mV \pm 2\text{Digits}$
Current Indication Accuracy	$1mA \pm 2\text{Digits}$	$1mA \pm 2\text{Digits}$



Model		PS6030
Output voltage		0-60V
Output current		30A
Ripple & Noise		$\leq 20\text{mVrms}$
Protection		current Limiting Short circuit
Display resolution	voltage	100mV
	current	100mA
Voltage Indication Accuracy		$\pm 0.5\%+2d$
Current Indication Accuracy		$\pm 3\%+5d$

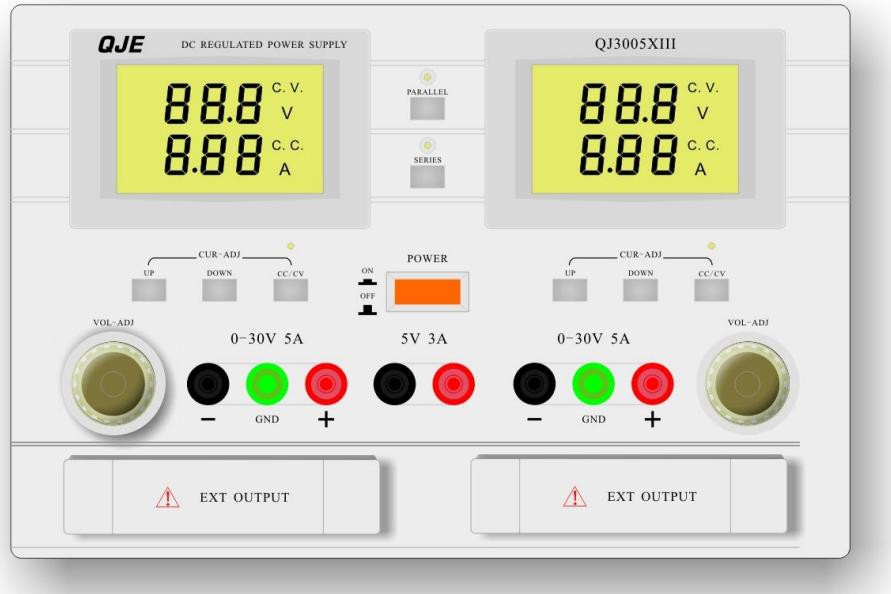

Model	QJ3003XIII	QJ3005XIII
Output voltage	0-30V	0-30V
Output current	0-3A	0-5A
Line Regulation	$CV \leq 1 \times 10^{-4} + 3mV$ $CC \leq 2 \times 10^{-4} + 6mA$	$CV \leq 1 \times 10^{-4} + 3mV$ $CC \leq 2 \times 10^{-4} + 6mA$
Load Regulation	$CV \leq 2 \times 10^{-4} + 3mV$ $CC \leq 2 \times 10^{-4} + 6mA$	$CV \leq 2 \times 10^{-4} + 3mV$ $CC \leq 2 \times 10^{-4} + 6mA$
Ripple & Noise	$CV \leq 1mV_{r.m.s}$	$CV \leq 1mV_{r.m.s}$
Protection	current Limiting	current Limiting
Display resolution	voltage	100mV
	current	10mA